

# VaporPro™ Product Data Sheet


## 15 MIL CLASS A VAPOR BARRIER

### MANUFACTURER

Revolution Commercial Solutions (TX), LLC  
3328 Executive Blvd  
Mesquite, TX 75149

### PRODUCT DESCRIPTION

VaporPro™ is a high-performance polyethylene film designed for use as a vapor retarder under concrete slabs. This film is manufactured in the United States of America using high quality prime, virgin resins. VaporPro is designed as a low permeance, high strength, and high puncture resistant film that meets and exceeds the ASTM E1745-17 requirements for a Class A vapor retarder.

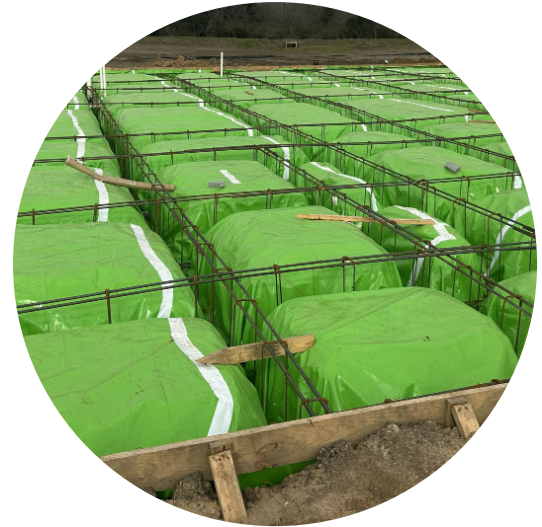

### TECHNICAL DATA

Technical Property	Test Method	15 Mil Results	Unit
Color		Green	
Thickness, Nominal		15	mils
Roll Dimensions: Commercial / Residential		14 x 140 / 14 x 70	feet
Surface Area: Commercial / Residential		1,960 / 980	feet <sup>2</sup>
Roll Weight: Commercial / Residential		141 / 71	lbs
Classification	ASTM E1745-17	Class A, B, & C	
Puncture Resistance	ASTM D1709	3,055	grams
Tensile Strength	ASTM D882	82	lbf/in
Permeance	ASTM F1249 ASTM E154		
New Material	Section 7	0.00464	perms
After Conditioning - after wetting, drying, soaking	Section 8	0.00383	
after heat conditioning	Section 11	0.00349	
after low temp conditioning	Section 12	0.00311	
after soil organism exposure	Section 13	0.00412	
Methane Gas Permeation	ISO 2782-1	287 GTR, mL(STP)/(m <sup>2</sup> *day)	
Radon Diffusion Coefficient	K124/02/95	(3.64 ± 0.36) × 10 <sup>-12</sup> (m <sup>2</sup> s <sup>-1</sup> )	

Note: perms = grains/(ft<sup>2</sup>\*hr\*in-Hg)

### INSTALLATION

VaporPro™ vapor barrier is to be installed by following the guidelines of ASTM E1643. Unroll the vapor barrier over a sand, tamped earth, or aggregate base. Ensure that the seams of vapor barrier overlap a minimum of six inches and are sealed using a low permeance, high adhesion seam tape. All penetrations of the vapor barrier film must be sealed.

### LIFETIME WARRANTY

Revolution offers a lifetime warranty on VaporPro™ to meet the published specifications as well as to be free of defects in product materials and workmanship at the time of shipment. Revolution does not offer any warranties with regards to the merchantability or fitness of products for a particular use. Please contact Revolution for more information surrounding the lifetime warranty of VaporPro™ solutions.

### SALES & TECHNICAL SERVICES

Sales and technical information can be obtained by contacting Revolution.

[vaporpro@revolutioncompany.com](mailto:vaporpro@revolutioncompany.com)  
972.216.3331  
[revolutioncompany.com](http://revolutioncompany.com)

**Revolution**

April 2026